

# WMIOT601 Specification

## V1.0.0

Beijing Winner Microelectronics Co., Ltd.

Address: 18<sup>th</sup> floor, Yindu Building, No.67 Fucheng Road, Haidian District, Beijing, P.R.China

Tel: +86-10-62161900

Company Website: [www.winnermicro.com](http://www.winnermicro.com)

## Document History

版本	完成日期	修订记录	作者	审核	批准
V1.0.0	2018-05-02	Initial release	Janvense	Kevin	Kevin

Winner Micro

## Content

1	Summary.....	1
2	Features.....	1
2.1	Interface.....	1
2.2	Wi-Fi .....	1
2.3	Others .....	2
3	Specification .....	2
4	Antenna Specification.....	3
5	Interface.....	3
6	Environmental adaptability .....	5
6.1	Low temperature working test.....	5
6.2	Low temperature storage test.....	5
6.3	High temperature working test.....	5
6.4	High temperature storage test.....	5
6.5	Vibration test.....	5
6.6	Environment protection certificate.....	6
7	Reference design of peripheral .....	6

## 1 Summary

WMIOT601 is a Wi-Fi reference design module based on embedded Wi-Fi SoC chip (W600), which has stamp hole interface, small size and is easy to develop. The module can be easily applied to smart appliances, smart home, health care, smart toy, and wireless audio & video, industrial and other IoT fields. This specification provides technical standards for the physical properties, technical specifications, communication protocols, product functions, performance, stability, environmental adaptability, and security of the module.

## 2 Features

### 2.1 Interface

- Stamp hole interface, spacing 2.0mm
- 2 \* UART interface, support RTS/CTS, baud rate: 1200bps~2Mbps
- One high speed SPI controller, operating frequency: 0~50MHz
- Integrated PWM controller
- Integrated GPIO controller

### 2.2 Wi-Fi

- Support GB15629.11-2006、IEEE802.11 b/g/n/e/i/d/k/r/s/w
- Support frequency range: 2.4~2.4835 GHz
- Support Wi-Fi WMM/WMM-PS/WPA/WPA2/WPS
- Support Wi-Fi Direct
- Support EDCA channel access
- Support 20/40M bandwidth
- Support STBC, Greenfield, Short-GI and reverse transmission
- Support RIFS interframe space
- Support AMPDU、AMSDU
- Support IEEE802.11n MCS 0~7, MCS32, transmission rate is up to 150Mbps
- Support Short Preamble in 2/5.5/11Mbps
- Support HT-immediate Compressed Block Ack, Normal Ack, No Ack
- Support CTS to self
- Support STA/AP/AP+STA function
- Support up to 32 multicast networks with different encryption methods in BSS

- As AP in BSS, the sum of sites and groups is up to 32 and in IBSS is up to

### 2.3 Others

- Programmable GPIO control signals
- Support AT+ instruction protocol (UART interface) base on ASCII (UART 接口)
- Support network protocol: TCP/UDP/ICMP/DHCP/DNS/HTTP
- Support DHCP Server, DNS Server
- Support extensible WEB server
- Support firmware on line update

## 3 Specification

Table 3-1 Product Specification List

	item	parameter	备注
Wi-Fi	Support Wi-Fi protocol	IEEE802.11b/g/n	
	RF system impedance	50 Ω	
	SWR	<-10dB	
	Frequency range	2.4~2.4835 GHz	
	Reception sensitivity	20MHz MCS7@-71dBm; 40MHz MCS7@-68dBm; 54Mbps@-73dBm; 11Mbps@-86dBm; 1Mbps@-95dBm;	
	Data rate in PHY	802.11n MCS 0~7 150Mbps	
	Modulation mode	DSSS、OFDM、DBPSK、DQPSK、CCK、QAM16/64	
	Output power	IEEE802.11b, CCK 11Mbps, POUT = +19 dBm; IEEE802.11g, OFDM 54Mbps, POUT = +13.5 dBm; IEEE802.11n, OFDM MCS7, POUT = +12dBm;	
	Antenna interface	IPX	3mm x 3mm
硬件部分	Interface	UART, SPI, GPIO, PWM	
	Data rate	2Mbps@UART (Max) 50Mbps@SPI (Max)	
	Working voltage	3.3V	
	Working current	Average 75mA	

	Working humidity	5%~90% (no condensation)	
	Storage temperature	-40~+125 °C	
	Working temperature	-40~+85°C	
	Size	17mm×17mm	
软件部分	Network type	STA/AP/AP+STA/Wi-Fi Direct	
	Authentication	WEP/WPA-PSK/WPA2-PSK	
	Encryption	WEP64/WEP128/TKIP/CCMP (AES)	
	WPS	WPS	
	Energy conservation	PS-POLL/Standby	
	Network protocol	TCP/UDP/ARP/ICMP/DHCP/DNS/HTTP	
	Interface protocol	AT+ instruction	

#### 4 Antenna Specification

Table 4-1 Recommended Specification for External Antenna

item	comment
Frequency range	2.4~2.4835 GHz
Impedance	50 Ω
Voltage standing-wave ratio	≦1.5
Polarization	Linear polarization
Interface	IPX

#### 5 Interface

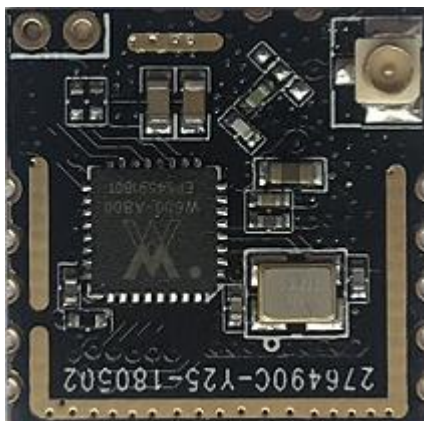


Figure 5-1 WMIOT601

The module stamp hole pin configuration is shown in Figure 5-2.

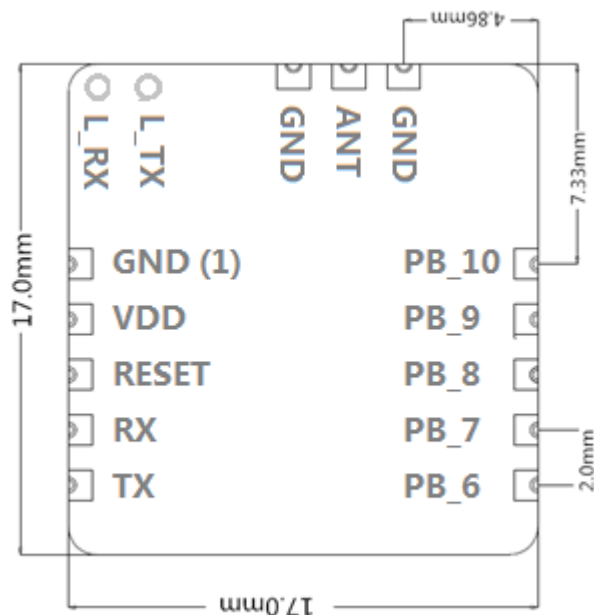


Figure 5-2 WMIOT601 Pin Configuration

Table 5-1 Pin Description

Pin No.	Name	Type	Function description after reset	Multi-Functions
1	GND	P	GND	
2	VDD	P	3.3V Power	
3	RESET	I	RESET	
4	PB_11	I/O	UART1_RX	H_SPI_DI/GPIOPB_11
5	PB_12	I/O	UART1_TX	H_SPI_DO/GPIOPB_12
6	PB_6	I/O	GPIOPB_6	PWM_4
7	PB_7	I/O	GPIOPB_7	
8	PB_8	I/O	GPIOPB_8	H_SPI_CK
9	PB_9	I/O	UART1_CTS	H_SPI_INT/GPIOPB_9
10	PB_10	I/O	UART1_RTS	H_SPI_CS/GPIOPB_10
11	GND	P	GND	

12	ANT	ANT	ANT	
13	GND	P	GND	
14	L_TX	I/O	UART0_TX	
15	L_RX	I/O	UART0_RX	

## 6 Environmental adaptability

### 6.1 Low temperature working test

- Reference standard: GB/T 2423.1-2001;
- Under the ambient temperature is  $-40\pm 1^{\circ}\text{C}$ , the sample of the module can continuously work for 72 hours, and all the functions and functions are well maintained after the test.

### 6.2 Low temperature storage test

- Reference standard: GB/T 2423.1-2001
- Under the ambient temperature of  $-40^{\circ}\text{C}$ , the sample of the module is placed for 72 hours, and all the functions and functions are well maintained after the test.

### 6.3 High temperature working test

- Reference standard: GB/T 2423.2-2001
- Under the ambient temperature is  $85\pm 1^{\circ}\text{C}$ , the sample of the module can continuously work for 72 hours, and all the functions and functions are well maintained after the test.

### 6.4 High temperature storage test

- Reference standard: GB/T 2423.2-2001
- Under the ambient temperature of  $125^{\circ}\text{C}$ , the sample of the module is placed for 72 hours, and all the functions and functions are well maintained after the test.

### 6.5 Vibration test

- Reference standard: GB/T 4798.5-2007
- Random vibration, vibration direction: X, Y and Z axis, displacement and frequency refer to 5M3 level in GB/T 4798.5-2007, vibration time: each axis 60min. In detail, please refer to 5M3 level in GB/T 4798.5-2007.



## 6.6 Environment protection certificate

➤ Conform to the RoHS IEC62321-1:2013 standard

## 7 Reference design of peripheral

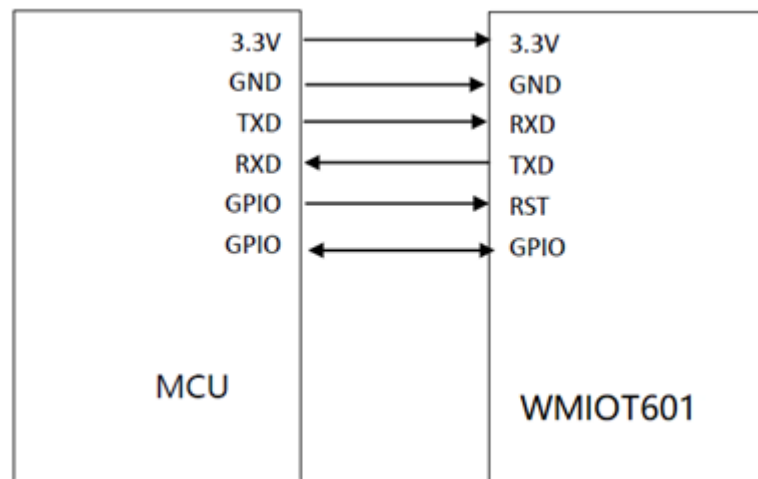


Figure 7-1 WMIOT601 reference design